



## TECHNICAL DATA

### MASSES

|                |       |
|----------------|-------|
| Net mass       | 67 kg |
| Operating mass | 68 kg |

### COMPACTION

|                     |                |
|---------------------|----------------|
| Impact force, kN    | 17 kN          |
| Vibration frequency | 10.0 – 11.8 Hz |

### TRACTION

|                    |                       |
|--------------------|-----------------------|
| Max. area coverage | 336 m <sup>2</sup> /h |
| Max. working speed | 20 m/min              |

### ENGINE

|                           |                         |
|---------------------------|-------------------------|
| Manufacturer/Model        | Honda GXR 120           |
| Number of cylinders       | 1                       |
| Type                      | Air cooled gasoline     |
| Emissions according to    | Stage V /CARB Phase III |
| Rated power               | 2.8 kW                  |
| Fuel tank capacity        | 3 l                     |
| Fuel consumption /h, avg. | 0.9 l                   |

### DRIVE SYSTEM



|              |            |
|--------------|------------|
| Drive system | Mechanical |
|--------------|------------|

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

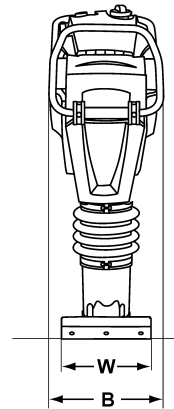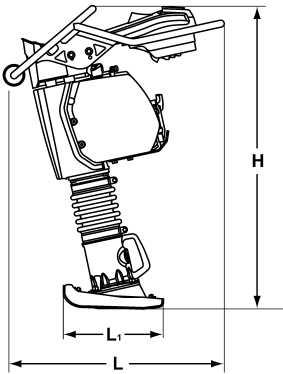

### DIMENSIONS

|                     |         |
|---------------------|---------|
| B. Width            | 350 mm  |
| H. Height           | 1030 mm |
| L. Length           | 728 mm  |
| L1. Length          | 335 mm  |
| W. Basic shoe width | 280 mm  |

### STANDARD EQUIPMENT

- Low vibration handle
- Dual stage fuel filter system
- Air filter
- Air pre-filter with self cleaning housing
- Auto oil level check before start
- Engine protection covers
- One knob to start or stop both engine & fuel
- Infinitely variable frequency
- Recoil starter
- Loading aid rollers on handle
- One point lift
- Hour and rpm display

### OPTIONAL EQUIPMENT

- Puncture proof transport wheels
- Foot widths & extensions
- Service kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.